


5MP USB Camera Module Specifications

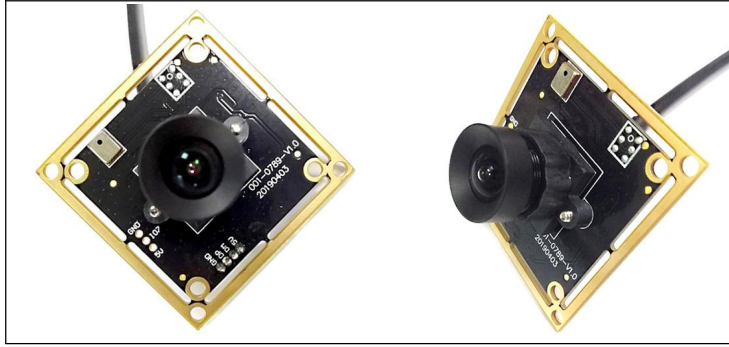

I. Main Parameters

Product Name	5MP USB2.0 Camera Module
Product Code	WN-LI909.K86
Module Size	38*38mm, 32*32mm
Image Sensor	1/2.8-inch IMX335 CMOS Sensor
Max. Resolution	2952 H x 1944 V
Pixel Size	2.0*2.0 μ m
Output Format	MJPEG, YUY2
Field of View	90°
Audio Input	Digital Microphone
Lens	EFL: 3.0mm, F/No. 2.5, 2G2P+IR 650nm
Focus Mode	Fixed Focus/ Manual Focus
Shutter Mode	Electronic Rolling Shutter
Dynamic Range	Up to 72dB
Output & Power Supply	High Speed USB2.0
Interface	4PIN 1.25mm Connector
Controllable Parameters	Brightness, Contrast, Saturation, Hue, Sharpness, Gamma, White Balance, Backlight Contrast, Exposure
Supported OS	UVC-compliant, Plug and Play for Windows, Android, Linux, Mac OS, etc.
Connection Cable	Default 1.0 Meter USB Cable

2. Supported Resolutions and Frame Rates

Formats	Resolutions	Frame Rates
MJPEG	2952x1944	30FPS
	2048x1536	30FPS
	1920x1080	30FPS
	1280x720	30FPS
	800x600	30FPS
	640x480	30FPS
YUY2	2952x1944	3FPS
	2048x1536	3FPS
	1920x1080	5FPS
	1280x720	10FPS
	640x480	30FPS

3. PIN Definitions


Pin No.	Signal Names	Descriptions
1	VCC	DC 5V

2	DM	USB2.0 Data-
3	DP	USB2.0 Data+
4	GNG	Ground

4. Working Conditions

Working Voltage	DC 5V
Working Current	140mA
Working Temperature	-20°C ~ 60°C
Storage Temperature	-20°C ~ 85°C
Humidity	80 ~85%

5. Shape and Dimensions (Unit: mm)

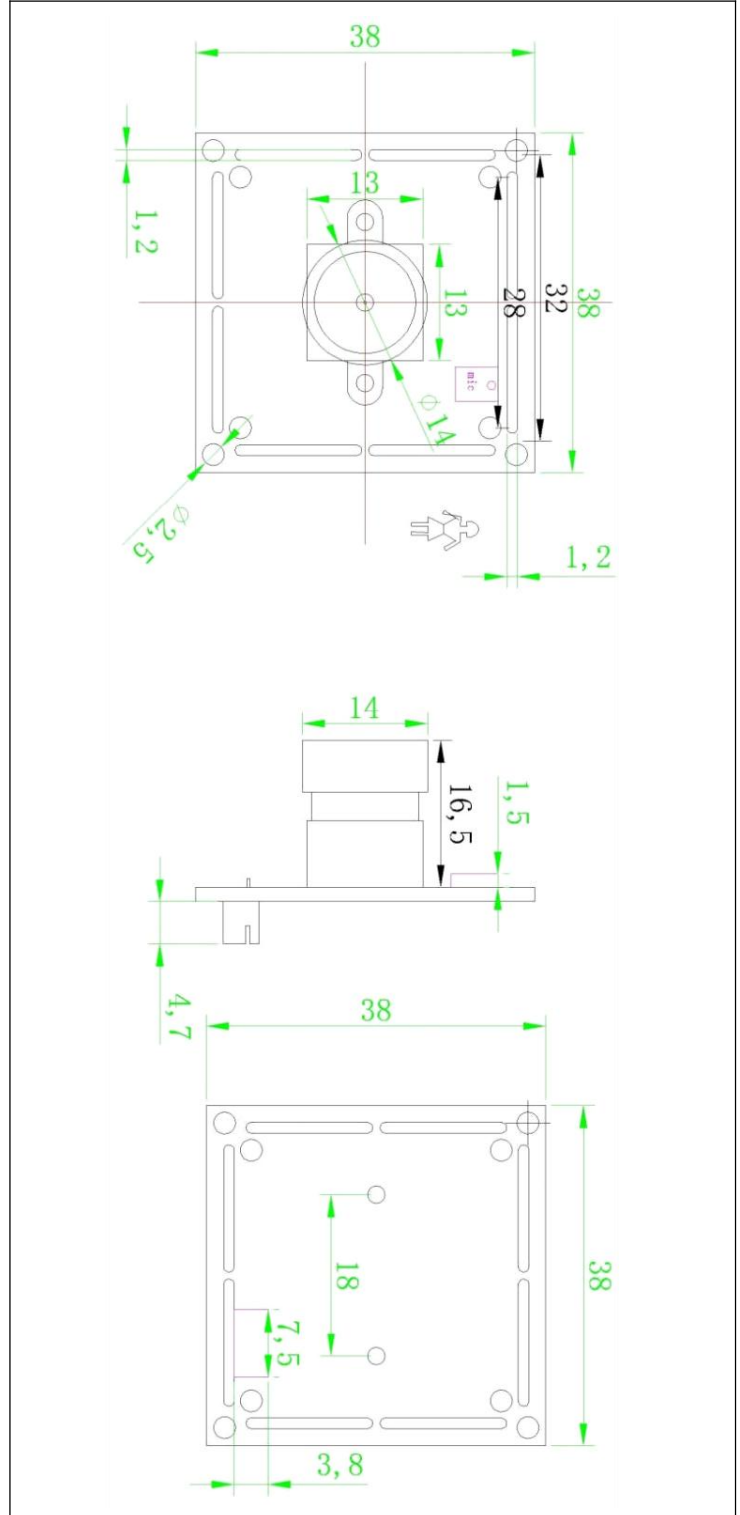

Shenzhen Weinan Electronics Co.,Ltd.

Building 2, Baoke Industrial Park, Longhua, Shenzhen, Guangdong, China

Tel: +86 0755 27526467

E-mail: sales@weinanelectronics.com

<https://www.weinanelectronics.com>