


2MP I080P USB2.0 Camera Module Specifications

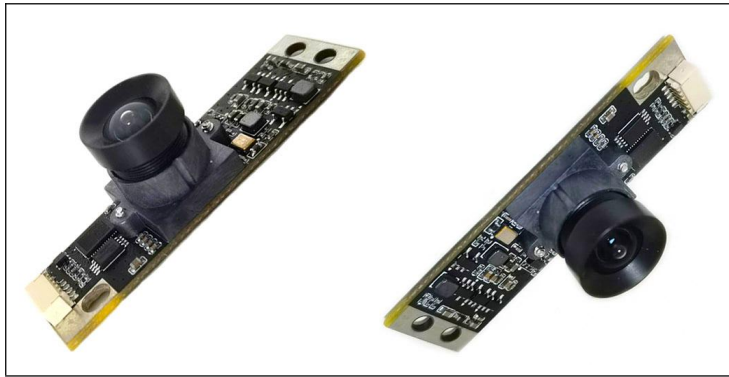

I. Main Parameters

Product Name	2MP I080P USB2.0 Camera Module
Product Code	WN-L2007.K114R
Module Size	60*15mm
Image Sensor	1/2.8-Inch IMX307 CMOS Sensor
Max. Resolution	1920 H x 1080 V
Frame Rate	60FPS
Pixel Size	2.9*2.9μm
Output Format	MJPEG, YUY2
Field of View	106°
Lens	F:2.67mm, 4E+650IR
Image Color	Color
Audio Input	No
Focus Mode	Fixed Focus/ Manual Focus
Shutter Mode	Electronic Rolling Shutter
Output & Power Supply	High Speed USB2.0
Interface	5PIN I.0mm Connector
Controllable Parameters	Brightness, Contrast, Saturation, Hue, Sharpness, Gamma, White Balance, Backlight Contrast, Exposure
Supported OS	UVC-compliant, Plug and Play for Windows, Android, Linux, Mac OS, etc.
Connection Cable	Default I.0 Meter USB Cable

2. Supported Resolutions and Frame Rates

Formats	Resolutions	Frame Rates
MJPEG	1920x1080 (I080P)	60FPS
	1280x720 (720P)	60FPS
	800x600 (WVGA)	60FPS
	640x480 (VGA)	60FPS
YUY2	1920x1080 (I080P)	5FPS
	1280x720 (720P)	10FPS
	640x480 (VGA)	30FPS

3. PIN Definitions

Pin No.	Signal Names	Descriptions
1	VCC	DC 5V
2	DM	USB2.0 Data-
3	DP	USB2.0 Data+

4	GND	Ground
5	GND	Ground

4. Working Conditions

Working Voltage	DC 5V
Working Current	130mA
Working Temperature	-20°C ~ 60°C
Storage Temperature	-20°C ~ 85°C
Humidity	80 ~ 85%

5. Shape and Dimensions (Unit: mm)

