


5MP USB2.0 Camera Module Specifications

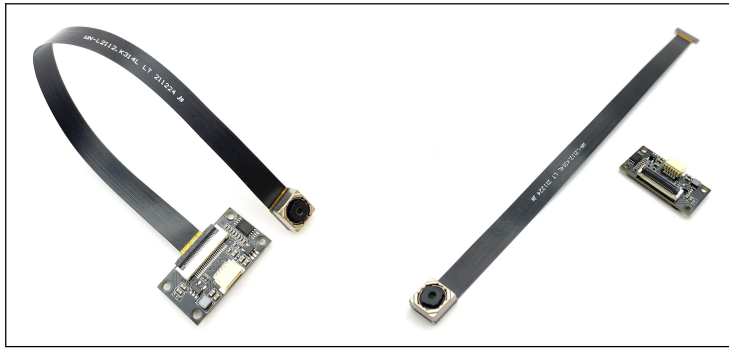

1. Main Parameters

Product Name	5MP USB2.0 Camera Module
Product Code	WN-L2112.K314L
Module Size	185.44*15mm
Image Sensor	1/4.0-inch OV5693 CMOS Sensor
Max. Resolution	2952 H x 1944 V
Pixel Size	1.4*1.4μm
Output Format	MJPEG, YUY2
Field of View	73°
Audio Input	Digital Microphone
Lens	EFL: 2.94mm, F/No. 2.0, 4P+IR 650nm
Focus Mode	Autofocus
Shutter Mode	Electronic Rolling Shutter
Dynamic Range	Up to 37.1dB
Output & Power Supply	High Speed USB2.0
Interface	5PIN 1.0mm Connector
Controllable Parameters	Brightness, Contrast, Saturation, Hue, Sharpness, Gamma, White Balance, Backlight Contrast, Exposure
Supported OS	UVC-compliant, Plug and Play for Windows, Android, Linux, Mac OS, etc.
Connection Cable	Default 1.0 Meter USB Cable

2. Supported Resolutions and Frame Rates

Formats	Resolutions	Frame Rates
MJPEG	2952x1944	30FPS
	2048x1536	30FPS
	1600x1200	30FPS
	1920x1080	30FPS
	1280x720	30FPS
YUY2	2952x1944	1FPS
	2048x1536	2FPS
	1600x1200	2FPS
	1920x1080	5FPS
	1280x720	8FPS
	640x48	30FPS

3. PIN Definitions

Pin No.	Signal Names	Descriptions
---------	--------------	--------------

1	VCC	DC 5V
2	DM	USB2.0 Data-
3	DP	USB2.0 Data+
4	GNG	Ground
5	GNG	Ground

4. Working Conditions

Working Voltage	DC 5V
Working Current	170mA
Working Temperature	-20°C ~ 60°C
Storage Temperature	-20°C ~ 85°C
Humidity	80 ~ 85%

5. Shape and Dimensions (Unit: mm)

